


Up2Stream Mini is a WiFi preamplifier board that can be installed in your existing regular speakers or amplifier to make them wireless enabled, and it is also an all-in-one solution to make customized wireless audio player. With 4STREAM application, you can play the same music to each room in sync or play different music to different rooms.



Up2Stream Mini V3

WiFi Audio Receiver
+
DLNA Audio Receiver
+
Airplay Audio Receiver
+
Multiroom Audio Receiver

APP Download



Main Features



WiFi



Internet Radio



DLNA



AirPlay



Multi-Room



NAS



UPnP



Stereo Pair

Streaming Services



Spotify



Pandora



Amazon Music



Internet Radio



QQ Music



Napster



Tidal



Qobuz



DEEZER



Tunein




iheartradio



Ximalaya

Interface Introduction

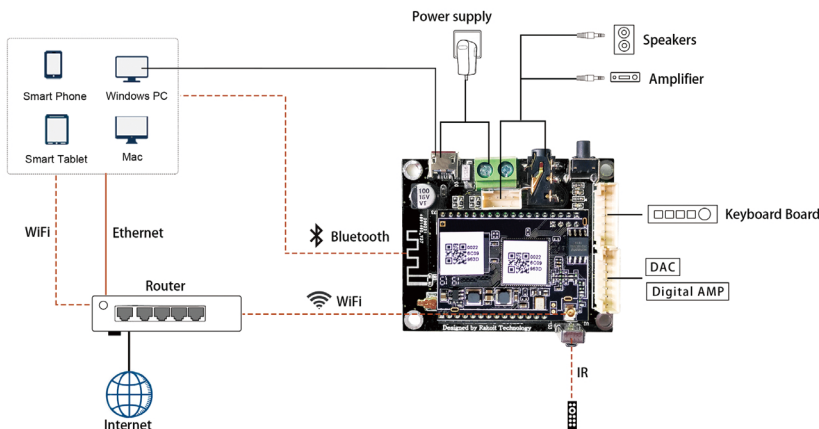

Technical Specifications

Connectivity	Wireless network	IEEE802.11 b/g/n 2.4G
	Bluetooth	5.0 SBC/AAC
Power Input *	5V-1A/2 pin connector	
	5V-1A micro USB input	
Audio output	Analog 3.5mm/4 pin connector	
	Digital I2S, SPDIF(44.1KHz)	
Frequency response	20Hz to 20kHz	
SNR	100dB @ 0dBFS, 1KHz	
THD+N	0.03% @ 0dBFS, 1KHz	

Music Format	FLAC/MP3/AAC/AAC+/ALAC/APE/WAV
Decoding	Up to 24bit/192kHz
Protocols	AirPlay, DLNA, UPnP, Spotify Connect, Qplay
NAS Support	NAS with DLNA support
Dimensions	55*45*12mm
Accessory	4Pin 220mm PH2.0 Cable
	Pin 220mm PH2.0 Cable
	2Pin 220mm Power Cable
	User Manual

* Warning: Up2Stream Mini must use 5V-1A DC input, higher voltage power supply may damage the board.